


Captain Flint Outdoor W1

Designed by Michael Anastassiades, 2015

10W - 629lm - 2700K - CRI> 80 - Beam° 112

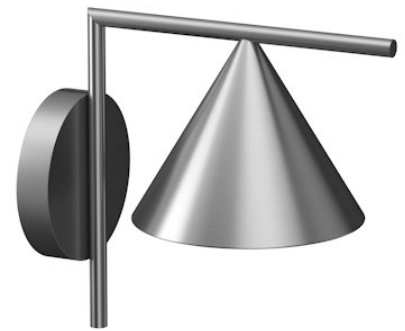


Wall-mounted lamp emitting diffused light. Fixed cone in painted and brushed aluminium. Features integrated 220–240 V on/off or 1–10 V/DALI dimmable electrical power. Plug & play electrical connection in the rose. IP68 connector for outdoor use included. 110 V version available upon request.

Designed by Michael Anastassiades, Captain Flint is a sleek and graceful design that embodies a sense of equilibrium, with the cone appearing to balance delicately on its point, creating a refined interplay between stability and movement. This outdoor wall-mounted version is the evolution of the original indoor floor design.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8054793216690
Mounting	Wall
Light source type	LED
Light sources included	Yes
LED type	LED array
Number of lamps	1
Power (W)	10
System power (W)	9.5
Source flux (lm)	989
Lumen Output (lm)	629

Physical

Colour	Brushed Stainless Steel
Trim	No
Orientation	Fixed
Spot diameter (mm)	208
Length (mm)	336
Net weight (kg)	2.1
Package height (mm)	257
Package width (mm)	406
Package length (mm)	406
Package volume (m3)	0.04
IP internal	65
Drive Over	No

Download

Mounting instructions [↓ ZIP](#)

Photometric Files

LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)




Schematic light drawing



h(m)	E(lx)	D(m)
1	217	3.05
2	54	6.11
3	24	9.16
4	14	12.22
5	9	15.27

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

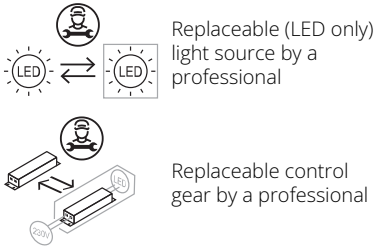

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	80
Beam angle C0-180 (°)	112
Beam angle C90-270 (°)	112
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Power supply type	Non Dimmable
Precabled	NO
Emergency	No
Batteries inside	No

Notes

110V & 2200K version upon request.