


## Captain Flint Outdoor W1


Designed by Michael Anastassiades, 2015

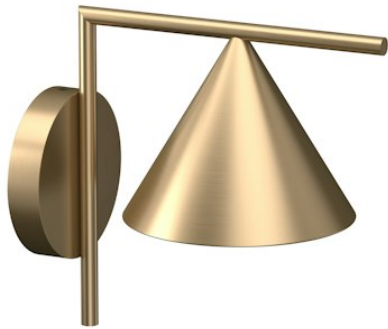

10W - 629lm - 2700K - CRI> 80 - Beam° 112

Wall-mounted lamp emitting diffused light. Fixed cone in painted and brushed aluminium. Features integrated 220–240 V on/off or 1–10 V/DALI dimmable electrical power. Plug & play electrical connection in the rose. IP68 connector for outdoor use included. 110 V version available upon request.

Designed by Michael Anastassiades, Captain Flint is a sleek and graceful design that embodies a sense of equilibrium, with the cone appearing to balance delicately on its point, creating a refined interplay between stability and movement. This outdoor wall-mounted version is the evolution of the original indoor floor design.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

### Main specifications

|                        |               |
|------------------------|---------------|
| EAN                    | 8054793216706 |
| Mounting               | Wall          |
| Light source type      | LED           |
| Light sources included | Yes           |
| LED type               | LED array     |
| Number of lamps        | 1             |
| Power (W)              | 10            |
| System power (W)       | 9.5           |
| Source flux (lm)       | 989           |
| Lumen Output (lm)      | 629           |

### Physical

|                     |              |
|---------------------|--------------|
| Colour              | Brass Finish |
| Trim                | No           |
| Orientation         | Fixed        |
| Spot diameter (mm)  | 208          |
| Length (mm)         | 336          |
| Net weight (kg)     | 2.1          |
| Package height (mm) | 257          |
| Package width (mm)  | 406          |
| Package length (mm) | 406          |
| Package volume (m3) | 0.04         |
| IP internal         | 65           |
| Drive Over          | No           |

### Download

Mounting instructions [ZIP](#)

### Photometric Files

LDT / IES [ZIP](#)

### Technical Drawings


2D [ZIP](#)

3D [ZIP](#)

[Bim](#) [ZIP](#)



### Schematic light drawing



Beam Angle: 114°

| h(m) | E(lx) | D(m)  |
|------|-------|-------|
| 1    | 217   | 3.05  |
| 2    | 54    | 6.11  |
| 3    | 24    | 9.16  |
| 4    | 14    | 12.22 |
| 5    | 9     | 15.27 |

### Photometric

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| Light distribution     | Symmetric |
| CCT (K)                | 2700      |
| CRI>                   | 80        |
| Beam angle C0-180 (°)  | 112       |
| Beam angle C90-270 (°) | 112       |
| Extreme cut off        | No        |

### Electrical

|                    |              |
|--------------------|--------------|
| Insulation class   | I            |
| Frequency (Hz)     | 50/60        |
| Main voltage (Vac) | 220-240      |
| Power supply       | Integrated   |
| Power supply type  | Non Dimmable |
| Precabled          | NO           |
| Emergency          | No           |
| Batteries inside   | No           |

### Notes

110V & 2200K version upon request.

### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

